




FX-HV SERIES HORIZONTAL – VERTICAL SYSTEM

The FX-HV Horizontal – Vertical System with its various settings can satisfy all requirements. Pins can adjust the total height and the barycenter. The support pins are positioned in such a way that vertical, circular blanks can be lifted, which is mostly needed on the saw. They can also lift washers and sheets. For horizontal transport, the system has a crane eyelet on the back. The steel construction is stable with a completely powder coated surface and the FX lifting magnet ensures maximum safety. Special dimensions are available on request. Made in Germany.

Standard conformity CE/EN 13155/MRL 2006/42 EWG.

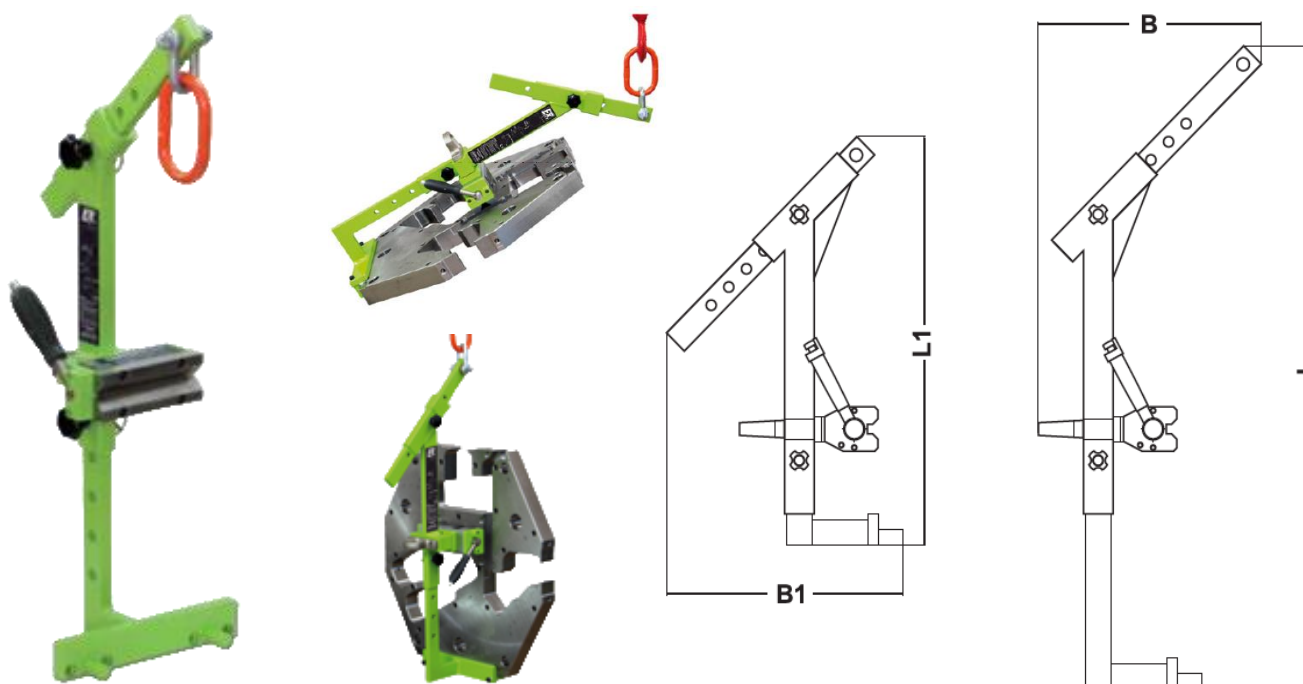

MODEL	MAX MATERIAL DIMENSION (mm)		MAX LOAD CAPACITY		DIMENSIONS (mm)				WEIGHT kg
	FLAT	ROUND	WITH STOP (kg)	WITHOUT STOP (kg)	L	B	L1	B1	
FX HV 200	2000X750	diam 250-750	200	40	1000	400	715	390	24
FX HV 400	2000X100	diam 400-1000	400	80	1250	450	795	475	31
FX HV 800	2500X125	diam 500-1200	800	160	1500	500	1040	520	64
FX HV 2000	2500X125	diam 500-1200	2000	400	1800	600	1200	650	250
FX HV 3000	2500X125	diam 500-1200	3000	600	1800	600	1200	650	320
Safety Factor 3.5 – Test Method EN 13155 – Max. operation temperature 80°C									

www.flexlifting.com

Flex Lifting - a brand of AxA Group srl
Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com