



FX-P SERIES


PERMANENT LIFTING MAGNETS

FOR THIN METAL SHEETS AND PIPES

FX-P is the lifting magnet series for professional lifting and moving thin plates, tubes and rods. The special magnet-configuration, which is connected with the FX-P prismatic pole, ensures a maximum magnetic flux density with thin material as well.

The FX-P can be well positioned and easy activated on a round material. Made in Germany.

Standard conformity CE/EN 13155/MRL 2006/42 EWG.

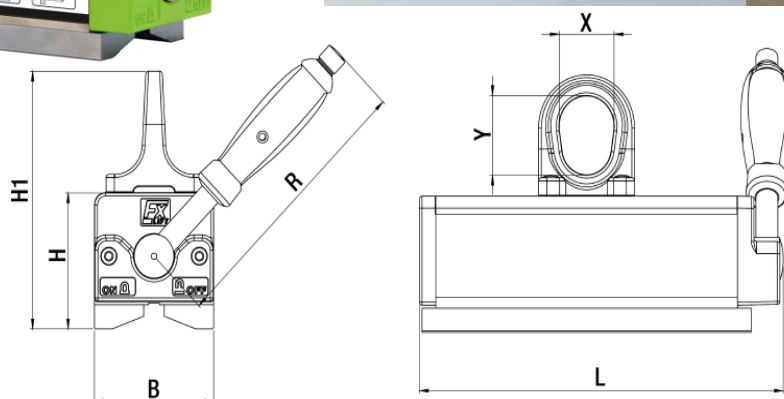

MODEL	MAX LOAD CAPACITY FOR SHEETS AND 4-EDGE PIPES (kg)						L X B Max. (mm)	PIPES Diam. (mm)	CAPACITY (kg) / Thick. (mm)
	3 mm	4 mm	6 mm	8 mm	10 mm	15 mm			
FX P170	50	80	120	170	170	170	2000X1250	diam.30 - 105	150/8 mm
FX P330	70	100	160	300	330	330	2500X1250	diam.40 - 160	300/10 mm
FX P650	100	160	200	450	530	650	3000X1500	diam.60 - 210	550/20 mm

MODEL	MAX LOAD CAPACITY (kg)		MAX LOAD CAPACITY FROM(mm)	DIMENSIONS (mm)						WEIGHT kg
	FLAT	ROUND		L	B	H	H1	R	X/Y	
FX P170	170	diam 30-105 mm 100 kg	8	195	64	70	134	136	30/42	5.1
FX P330	330	diam 40-160 mm 300 kg	10	265	87	90	170	190	42/53	12.4
FX P650	650	diam 60-210 mm 550 kg	20	352	112	106	203	228	51/62	26

Safety Factor 3.5 – Test Method EN 13155 – Max. operation temperature 80°C

www.flexlifting.com

Flex Lifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com