



FX-R SERIES



PERMANENT LIFTING MAGNETS FOR ROUND MATERIAL

FX-R is the lifting magnet series for round material handling. The deep, flat angle prism ensures a secure position on the load and conducts the magnet field into the interior of the material.

The magnet system can be activated over the entire diameter, without being rebounded.

Even thin, flat material is not a problem for the FX-R. Made in Germany.

Standard conformity CE/EN 13155/MRL 2006/42 EWG

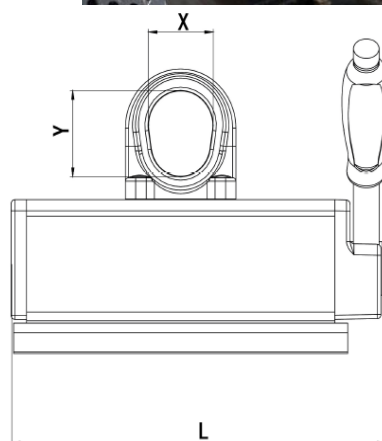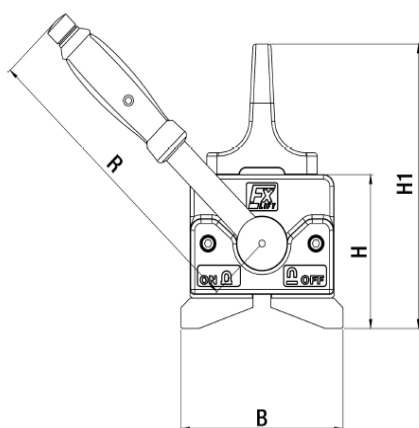

MODEL	MAX LOAD CAPACITY (kg)		MAX LOAD CAPACITY FROM(mm)	DIMENSIONS (mm)						WEIGHT kg
	FLAT	ROUND		L	B	H	H1	R	X/Y	
FX R100	100	diam 25-150 mm 100 kg	8	161	70	68	132	136	30/42	4
FX R225	225	diam 50-205 mm 225 kg	10	205	98	90	170	190	42/53	9.5
FX R450	450	diam 50-270 mm 450 kg	20	288	126	112	207	228	51/62	22
FX R750	750	diam 70-370 mm 750 kg	20	361	170	142	262	261	60/76	49
FX R1200	1200	diam 120-560 mm 1200 kg	40	472	248	190	334	409	68/89	127
FX R1800	1800	diam 120-560 mm 1800 kg	40	648	248	190	334	534	68/89	182
Safety Factor 3.5 – Test Method EN 13155 – Max. operation temperature 80°C										

www.flexlifting.com

Flex Lifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com