




FX-V SERIES

PERMANENT LIFTING MAGNETS WITH 90° PRISM

FOR BEAMS, PROFILES AND HOT PARTS

FX-V Lifting Magnets are geared to particular areas of application in steel, ship and container building. Because of the 90° prism, the angle profiles can be lifted safely. While lifting hot flame cuts, the deep prism protects the inserted magnets from the heat. The FX-V will be activated by a single stable, smooth running lever. Made in Germany.
Standard conformity CE/EN 13155/MRL 2006/42 EWG

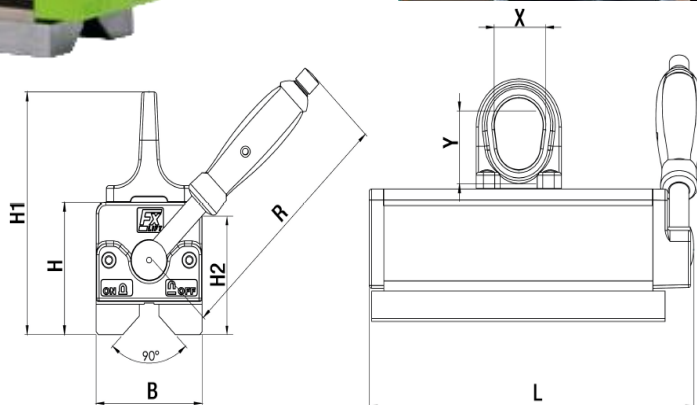

MODEL	H2 (mm)	IPE	HEB
FX V200	65	from 80	from 100
FX V400	87	from 100	from 120
FX V800	106	from 140	from 160

MODEL	MAX LOAD CAPACITY (kg)		90°	MAX LOAD CAPACITY FROM(mm)	DIMENSIONS (mm)						WEIGHT kg
	FLAT	ROUND			L	B	H	H1	R	X/Y	
FX V200	200	diam 25-50 mm 100 kg	120	10	195	64	77	141	134	30/42	5.5
FX V400	400	diam 25-60 mm 200 kg	250	15	265	87	96	176	188	42/53	13
FX V800	800	diam 35-75 mm 300 kg	400	20	352	112	115	210	228	51/62	28

Safety Factor 3.5 – Test Method EN 13155 – Max. operation temperature 150°C

www.flexlifting.com

Flex Lifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com